


**Locate:
Connection Ports**

Locate the connection ports. On your Verifone Vx570, you can find them on the back side of the terminal.

Step 1

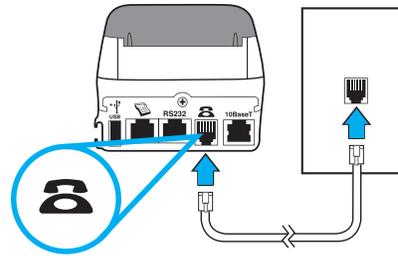


**Connect:
Telephone Line**

Connect the telephone cord to the communication port, then route it directly to a telephone jack.


Step 2

Insert: Paper Roll

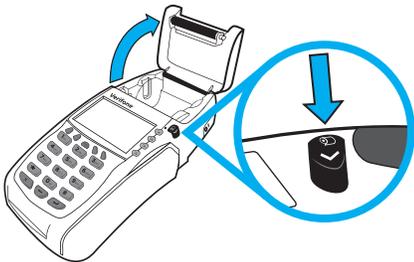


Opening Printer Cover

Press the button located on the right side of the terminal to unlatch the paper roll cover.



Loading Paper Roll

Hold the roll so the paper feeds from the *bottom* of the roll.
Drop paper roll into the printer tray.
Pull paper up past the glue residue from printer tray.



Closing Paper Roll Cover


Close the paper roll cover by gently pressing directly on the cover until it clicks shut, allowing a small amount of paper to stick out.

Step 3

**Connect:
PIN Pad**

Insert the larger end of the RJ45-type connector into the PIN Pad serial port on the back of the terminal.

Insert the smaller RJ45-type connector into the port located on the back of the PIN Pad device.

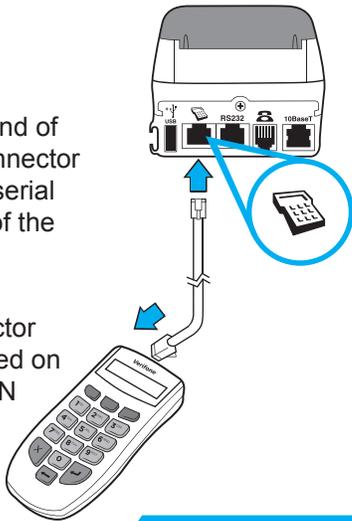

Step 4

Connection Port Symbols



PIN Pad Connection Symbol




Power Port Symbol



Communication Port Symbol


Reference

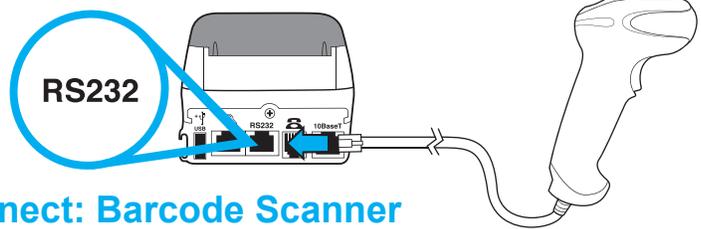

Connect: Barcode Scanner

Insert the RJ45-type connector cord attached to the Barcode scanner, into the RS232 port on the back of the device.

Step 5

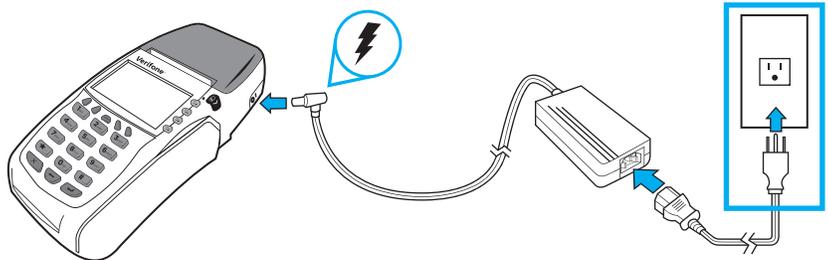

Connect: Terminal Power Pack

Insert the round barrel connector into the power port.
Route the cable through cable retainer to secure the power cord.
Insert the AC power cord into the power pack. Plug the AC power cord into a wall outlet or surge protector.

Step 6